


DEVILBISS
 AUTOMOTIVE REFINISHING

CAMAIR
 by DeVilbiss

CT Plus™
5-STAGE
FILTER SYSTEM

 Order No.
130522
CamAir CT Plus™
Order No. Description

130522	CT Plus 5-stage compressed air treatment and drying center
130517	Filter element, water
130518	Filter element, coalescing
130504	DC30 desiccant cartridge


Worry free air filtration for top quality paint jobs

- First stage filter removes oil, water and dirt down to 40 microns
- Second stage coalescer removes oil vapors and dirt particles down to .01 microns
- CT30 desiccant tank repeats dirt and oil aerosol removal and removes humidity

75 CFM capacity at 100 PSI
Easy and economical maintenance


- Longer desiccant life
- Air inlet valve shuts off CT Plus™ air without having to shut off shop air
- No tools needed to change first and second stage filters
- Easy change-out desiccant cartridge bag

Ergonomic, self-relieving regulator
Complete compressed air treatment and drying center
ACCESSORIES
130516
 Regulator assembly

130517
 Filter element, water and particulates

130518
 Filter element, coalescing

130527
 Filter element, charcoal

130529
 CamAir Paint
 Dryer and
 Stand

703086
 HVLP
 Waterborne, 1.3

703087
 HVLP
 Waterborne, 1.4

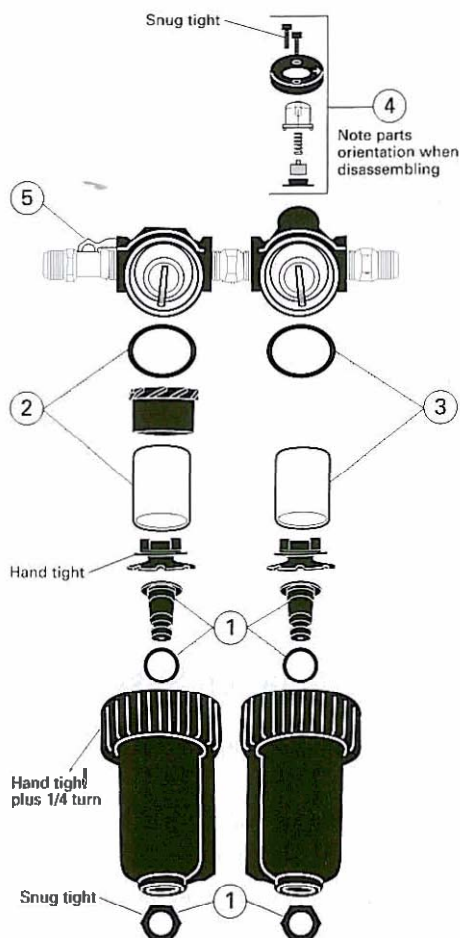
703088
 High Efficiency
 Waterborne, 1.2 & 1.3


DEVILBISS
 AUTOMOTIVE REFINISHING


Refer to Service Bulletins and Instructions: SB-6-182, SI-6-18-8-A, SI-6-18-10

Customer Service
 1-800-445-3988

CamAir CT Plus™

130522 (Camair 2-Stage Filter, CT30 Desiccant Dryer, Camair Regulator)


2-Stage Filter Set Parts

Ref. No.	No.	Description	Ind. Parts
1	130519	Drain Kit (1 set)	
2	130517	Filter Element, Water	
3	130518	Filter Element, Coalescing	
4	130520	Indicator Kit, Coalescing	
5	VA-595	Shut-off Valve	

2-STAGE FILTER SPECIFICATIONS

Air Flow	65 SCFM @ 90 PSIG
Max. Pressure	150 PSIG
Max. Temperature	150°F



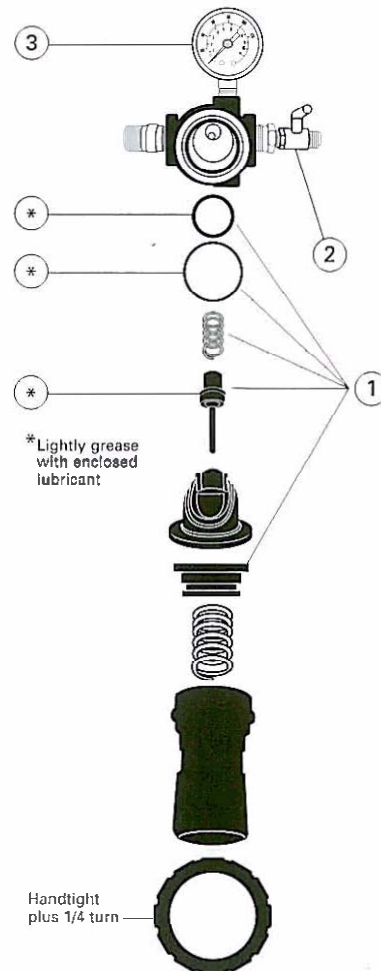
CT30 Parts

Ref. No.	Order No.	Description	Ind. Parts Req.
1	130505	Humidity Indicator (1 Humidity Indicator Paper included)	1
2	130511	Drain (Manual)	1
3	130510	Gasket	1
*4	130504	Desiccant Cartridge (not shown)	1

*Material Safety Data Sheet (MSDS-52) is available upon request.

CT30 SPECIFICATIONS

Air Inlet	1/2" NPT (Female)
Air Outlet	1/2" NPT (Female)
Air Flow Capacity	30 CFM
Max. Operating Pressure	200 PSIG (14 Bar)
Max. Temperature	150°F (65.6°C)
Humidity Indicator	Green: OK Yellow: Replace Desiccant
Water Vapor Removal	-40°F Dew point
Particulate Removal	.01 micron
Manual Drain	Included



Regulator Parts

Ref. No.	Part No.	Description	Ind. Parts Req.
1	130521	Regulator Kit	1
2	VA-594	Shut-off Valve	1
3	GA-288	Gauge	1

REGULATOR SPECIFICATIONS

Air Flow	65 SCFM @ 100 PSIG
Max. Inlet Pressure	250 PSIG
Regulated Pressure Range	2-125 PSIG
Max. Temperature	175°F

CAMAIR
 by Devilbiss
