



CUSTOM AEROSOLS

EVERYTHING YOU NEED TO FILL YOUR OWN AEROSOLS



**INCREASE
REVENUE
WITH
CUSTOM
AEROSOLS**

**QUICK, CLEAN,
& EASY TO USE**

**LIMITLESS
COLOR
COMBINATIONS**

**SOLVENT &
WATERBORNE
BLANKS**

FILL MACHINES & ACCESSORIES



Custom Fill™ Manual Machine

Part: 70801

Fills aerosols on location without an air compressor.

COMPATIBLE BLANKS

- Custom Fill Aerosol Blank
- Waterborne Custom Fill Aerosol Blank

AVERAGE FILL RATE


15 cans per hour

Custom Fill™ Cylinder

Part: 70706

COMPATIBLE MACHINE

- Custom Fill Pneumatic Machine

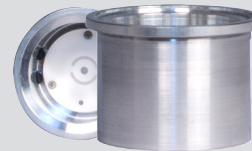

Custom Fill™ Pneumatic Machine

Part: 70701

Requires an air compressor and fill aerosols quickly.

COMPATIBLE BLANKS

- Custom Fill Aerosol Blank
- Waterborne Custom Fill Aerosol Blank

AVERAGE FILL RATE

30 cans per hour

OMNI-FILL MACHINE CONVERSION KITS

Female Conversion Kit


Part: 72011

CONVERTS

- Omni-Fill 11 Fill Machine

COMPATIBLE BLANKS (AFTER INSTALLATION)

- Universal Color Coat Aerosol Blanks
- Multi-Coat Aerosol Blank

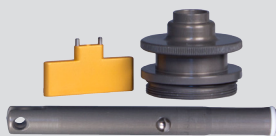

Female Filling Head

Part: 72000

CONVERTS

- Omni-Fill 14 Fill Machine
- Omni-Fill 35 Fill Machine
- Omni-Fill 100 Fill Machine

COMPATIBLE BLANKS (AFTER INSTALLATION)

- Universal Color Coat Aerosol Blanks
- Multi-Coat Aerosol Blank



TECH TIP

SAVE COUNTER SPACE BY UTILIZING A CUSTOM FILL WALL BRACKET

Custom Fill™ Wall Bracket

Part: 70704



AEROSOL BLANKS



Custom Fill™ Aerosol Blank

Part: 61993

Fill these blanks with solvent paints such as urethane basecoat, single stage, acrylic, alkyd enamels or acrylic lacquers.

SIZE: 16 oz. Aerosol

FILL WEIGHT: 90 grams

COMPATIBLE MACHINES

- Custom Fill Manual Machine
- Custom Fill Pneumatic Machine

COMPATIBLE PAINTS

- Solvent basecoats
- Single stage urethane basecoats
- Enamel basecoats
- Acrylic & alkyd enamels
- Acrylic lacquers

ADDITIONAL FEATURES

- Professional spray pattern
- Comfort tip



Waterborne Custom Fill™ Aerosol Blank

Part: 62003

Use waterborne paints such as **Sure-Coat™** or waterborne basecoats to fill these blanks.

SIZE: 16 oz. Aerosol

FILL WEIGHT: 90 grams

COMPATIBLE MACHINES

- Custom Fill Manual Machine
- Custom Fill Pneumatic Machine

COMPATIBLE PAINTS

- **Sure-Coat™**
- Waterborne basecoats

ADDITIONAL FEATURES

- Professional spray pattern
- Comfort tip



Universal Color Coat™ Aerosol Blank

Part: 15993

Create custom aerosols using these blanks and filling them with **Color Coat™** toners, the leading interior refinishing system for over 25 years.

With **Universal Color Coat**, you can change or renew color on most flexible and rigid plastics, carpet, vinyl and velour.

SIZE: 16 oz. Aerosol

FILL WEIGHT: 180 grams

COMPATIBLE MACHINES

- Omni-Fill Machines
- Older Fillon Machines

COMPATIBLE PAINTS

- SEM Color Coat



Multi-Coat™ Aerosol Blank

Part: 61003

Fill **Multi-Coat** blanks with enamel, lacquer and vinyl resin systems. This convenient aerosol gives you the freedom you need.

SIZE: 16 oz. Aerosol

FILL WEIGHT: 100 grams


COMPATIBLE MACHINES

- Omni-Fill machines
- Older Fillon machines

COMPATIBLE PAINTS


- Solvent basecoats
- Single stage urethane basecoats
- Enamel basecoats
- Acrylic & alkyd enamels
- Acrylic lacquers

HOW TO FILL A CUSTOM FILL AEROSOL BLANK

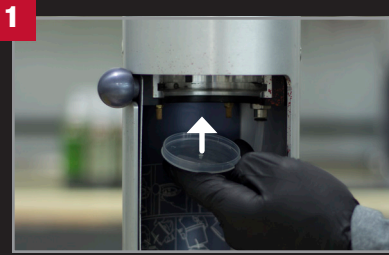

PLACE DISC IN MACHINE

Remove disc from cap and cover piston.

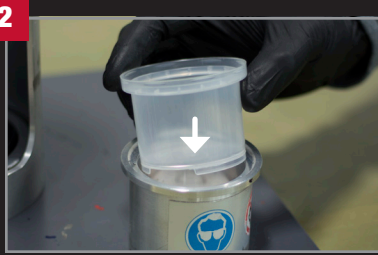

PLACE CAP INTO CYLINDER

Place clear plastic cap cup into the machine's cylinder. Press down and rotate the cap until it locks into place.



FILL WITH COMPATIBLE PAINT

Remove the tip from the aerosol.

Press the cylinder/cap assembly firmly onto the top of the aerosol blank.

Fill the clear plastic cap cup with compatible paint to the line on the inside.



LOCK THE CAN IN PLACE

Place assembly into machine.

Tighten the wheel on the bottom to secure the aerosol in place. If this is not done the can will shift.



FILL THE CAN

Close the door on the **Custom Fill Machine**.

Manual Machine: Rotate the crank until you can no longer rotate.

Pneumatic Machine: After closing the door, the machine will fill the aerosol.

After the machine is silent, open the door and remove the can.



REMOVE CAP & REPLACE TIP

Remove the clear cap from the cylinder by holding the cylinder and pressing down on a hard surface.

Replace tip and purge solvent by test spraying for a few seconds.



PHONE

TECH SUPPORT
1-800-831-1122

CUSTOMER CARE
1-866-327-7829



EMAIL

TECH SUPPORT
tech@semproducts.com

CUSTOMER CARE
cust_care@
semproducts.com



HOURS

MON - THURS
8 a.m. – 5 p.m. EST

FRI
8 a.m. – 4:30 p.m. EST



WEBSITE

Visit our website
for product info,
TDS sheets and
SDS sheets
semproducts.com



FACEBOOK

Find us on
Facebook to
get great tips
www.facebook.com/
semproducts



The Right Choice